



# PHOTOLUMINESCENT STAIR TREAD MODEL: 7600-TREAD-F

## FEATURES:

- Anti-slip
- Non-toxic
- Non-electric
- Non-radioactive
- Environmentally friendly
- Fire-resistant
- UV-stable
- Long-lasting
- Easily installed and maintained
- Visual Demarcation

## TESTS PASSED:

- Meets the mandate of CAN/ULC S-572
- UL 1994 Listed
- RS 6-1 Illuminance Test ISO 17398 (NYC minimum BR: 30-8-5);
- ASTM E2072-00;
- Meets ICC-ES AC169;
- RS 6-1 cleaning test – ASTM D 4828;
- RS 6-1 flame spread test – ASTM D 635;
- RS 6-1 toxicity test – Bombardier SMP800-C;
- RS 6-1 radioactivity tests ASTM D3648.

## TECHNICAL INFORMATION:

- Aluminum Stair Frame
  - 6063 T6 Anodized Aluminum Track
  - 2.36" x 0.141" x 39.37"
  - 60mm x 3.6mm x 1,000mm
  - Custom lengths available on request
- G7534: (Photoluminescent Material)
  - 1.20" (30.48mm) Semi Rigid Photoluminescent Material
  - Matte Finish
  - 1" (25mm) Exposed Visibility
  - Thickness: .052" (1.40mm)


## POWER REQUIREMENTS:

- NO additional electrical or mechanical source required.


## INSTALLATION:

- Permanent installation.
- For new installs or retrofits.

## Aluminum Track Dimensions

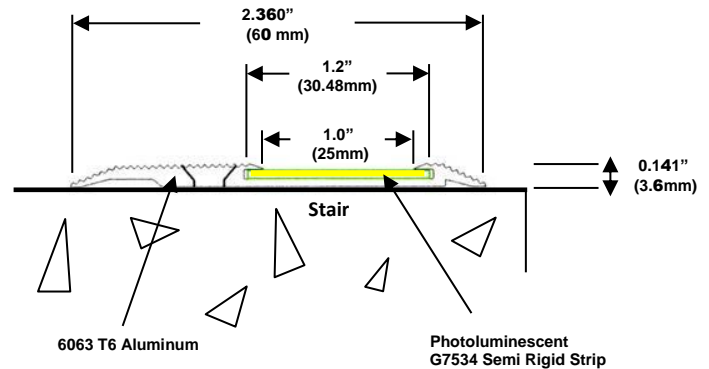

## Aluminum Track with Photoluminescent Semi Rigid Interactive Diagram

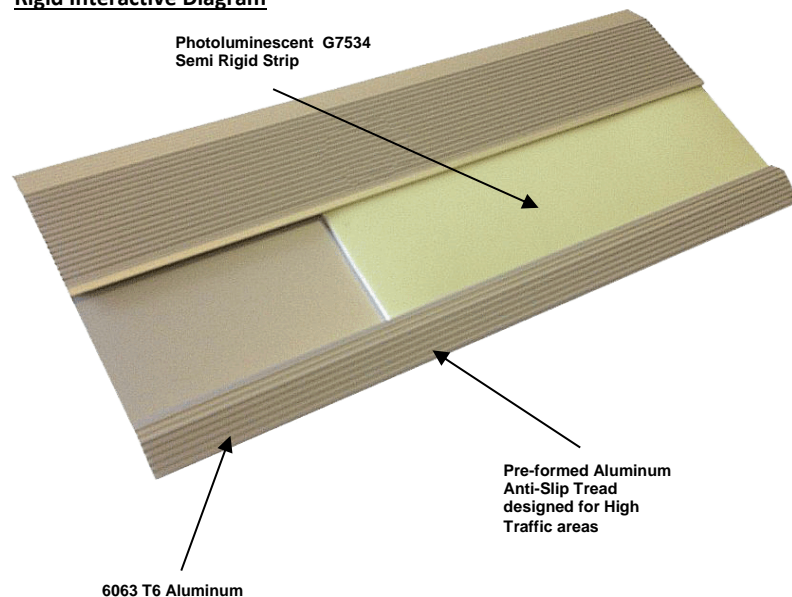

**Easy installation for new builds and retrofits**

**Adheres to all Provincial and National building codes for egress**